


Type NMFG

NSF Certified Component
Liquid-TightFlexibleNon-MetallicConduit(LFNC)



Construction

- One-piece construction of rigid, non-metallic reinforcement embedded in flexible PVC wall for exceptional crush and corrosion resistance.
- Flexible thermoplastic PVC jacket formulated for food and beverage applications per FDA CFR 21 and NSF 51 requirements.
- Jacket is easily cleaned and does not promote bacteria growth

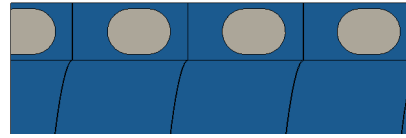

Rigid PVC Reinforced 3/8" through 2"

Installation

- NSF Certified to NSF/ ANSI 169 for special purpose food equipment or devices.
- Delivers superior wiring protection where incidental food contact is possible.
- Conduit used with standard liquid-tight connector for easy installation. IP 66/67 Rated when installed with approved connectors.
- Suitable for use in restaurants, food processing facilities, poultry packing facilities, meat packing facilities, wash down areas, waste water treatment, pharmaceutical applications and on special purpose food equipment or devices.
- Manufactured in a full range of trade sizes from 3/8" through 2".
- Rated for temperature range of -4°F to +140°F (-20°C to +60°C).

Places Of Interest

- Food Equipment or Devices NSF/ANSI 169
- Food Equipment Manufacturers SIC 3556
- Meat Packing SIC 2011 NAICS 311613
- Poultry SIC 2015 NAICS 311615
- Pharmaceuticals SIC 2834 NAICS 325412

www.fda.gov

www.nsf.org

www.naed.org

www.nema.org

www.anametelectrical.com



NSF Component COMPONENT • FDA Approved Compound • RoHS WEEE COMPLIANT

Type NMFG

Blue thermoplastic PVC



Product Specifications

Ordering Information

Electrical Trade Size		Inside Diameter		Outside Diameter		Approx Inside Bend Radius	Approx Weight lbs.	Small Carton	
Inches	mm	Inches		Inches		Inches	PER 100 FT.	Length Feet	NAED PIN
		MIN.	MAX.	MIN.	MAX.				
3/8	12	.484	.504	.690	.710	2.0	11	100	3590120
1/2	16	.622	.640	.822	.840	3.5	15	100	3590160
3/4	21	.820	.840	1.030	1.050	4.5	20	100	3590200
1	27	1.041	1.066	1.290	1.315	6.5	26	100	3590260
1-1/4	35	1.380	1.410	1.630	1.660	8.0	36	50	3590350
1-1/2	41	1.575	1.600	1.865	1.900	9.0	44	50	3590400
2	53	2.020	2.045	2.340	2.375	11.0	66	50	3590500

Note: 1. Other colors available on request.

Typical Specification

Conduit shall be Anaconda SEALTITE® Type NMFG. Conduit shall provide a flexible liquid-tight raceway for wiring and shall be constructed of non-metallic PVC material and shall be used for inside, outside and corrosive applications. Conduit IP 66/67 rated when installed with approved **Type B** connectors. Type NMFG conduit shall be used for applications where incidental food contact is possible.